


CFS-T RRS - THE SOLUTION FOR SINGLE CABLES AND PIPES

CFS-T RRS – plug seal

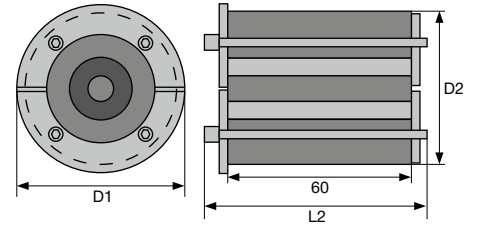

Sealing individual cables and pipes against fire, gas and to ensure watertightness in cored holes or sleeved pipes.

Technical information

The CFS-T RRS plug seal consists of an elastic, halogen-free and highly flame-resistant synthetic rubber (HFE) insert with tensioning bolts and plates made from galvanized steel or A4 stainless steel material 1.4571 (AISI316Ti).




Type	Cable/pipe diameter	D2	D1	Tolerance / bore type	L2	No. of bolts	Bolts
CFS-T RRS-43/0+5-23	0+5-23 mm	43 mm	53 mm	43 - 45 mm	75 mm	4	M5x70
CFS-T RRS-50/0+13-33	0+13-33 mm	50 mm	60 mm	50 - 52 mm	75 mm	4	M5x70
CFS-T RRS-70/0+23-51	0+23-51 mm	70 mm	80 mm	70 - 72 mm	75 mm	4	M5x70
CFS-T RRS-100/0+34-78	0+34-78 mm	100 mm	110 mm	100 - 103 mm	76 mm	6	M6x70
CFS-T RRS-100/0+23-78	0+23-78 mm	100 mm	110 mm	100 - 103 mm	76 mm	6	M6x70


CFS-T RRS-43/0+5-23		CFS-T RRS-50/0+13-33		CFS-T RRS-70/0+23-51	
Cable diameter and corresponding system part					
22 - 23 mm	Basic	32 - 33 mm	Basic	49 - 51 mm	Basic
17 - 21 mm	Adapter grey L	27 - 31 mm	Adapter grey L	44 - 48 mm	Adapter red L
13 - 16 mm	Adapter black L	23 - 26 mm	Adapter black L	39 - 43 mm	Adapter grey L
11 - 12 mm	Adapter ring red	22 - 23 mm	Adapter ring red	34 - 38 mm	Adapter black L
8 - 10 mm	Adapter grey S	17 - 21 mm	Adapter grey S	32 - 33 mm	Adapter ring red
5 - 7 mm	Adapter black S	13 - 16 mm	Adapter black S	27 - 31 mm	Adapter grey S
-	Core	-	Core	23 - 26 mm	Adapter black S
				-	Core

CFS-T RRS-100/0+34-78		CFS-T RRS-100/0+23-78	
Cable diameter and corresponding system part			
76 - 78 mm	Basic	76 - 78 mm	Basic
70 - 75 mm	Adapter black XL	70 - 75 mm	Adapter black XL
64 - 69 mm	Adapter red XL	64 - 69 mm	Adapter red XL
58 - 63 mm	Adapter grey XL	58 - 63 mm	Adapter grey XL
52 - 57 mm	Adapter black L	52 - 57 mm	Adapter black L
49 - 51 mm	Adapter ring red L	49 - 51 mm	Adapter ring red L
44 - 48 mm	Adapter red L	44 - 48 mm	Adapter red L
39 - 43 mm	Adapter grey L	39 - 43 mm	Adapter grey L
34 - 38 mm	Adapter black M	34 - 38 mm	Adapter black M
		32 - 33 mm	Adapter ring red S
		27 - 31 mm	Adapter grey S
		23 - 26 mm	Adapter black S

CFS-T SL sleeves



CFS-T SLF sleeves



Sleeve type	To be used for	ID	OD	FD	T
CFS-T SL 50 CFS-T SLF 50	CFS-T RRS 50	50.6 mm	57.0 mm	157 mm	70 mm
CFS-T SL 70 CFS-T SLF 70	CFS-T RRS 70	70.3 mm	76.1 mm	176 mm	70 mm
CFS-T SL 100 CFS-T SLF 100	CFS-T RRS 100	102.2 mm	108.0 mm	208 mm	70 mm