

QUICK, EASY AND VERSATILE.

The Hilti Cable Transit System.

One system – a host of advantages

Designed as a modular system, the Hilti Cable Transit System solves three problems simultaneously. These versatile sets consisting of the fire-resistant, gas- and watertight basic module, module adapter and core module not only seal around cables quickly and reliably, they're also re-usable. That saves time, cuts costs and helps keep your inventory to a minimum.

Basic module

The basic module for sealing around cables to a tolerance of 2-3 mm (without use of an adapter). The modules are supplied in a joined-together state but can be easily separated for individual use. Available in 7 different module sizes (15, 20, 30, 40, 60, 90 and 120mm).

Adapter module


Adapter modules in black or gray for sealing around cables to a tolerance of 3-5 mm.

Core module


The core module is used as a filler where space is reserved for future cable installations.

Filler modules

Space reserved for future cable installations can be filled with the filler modules in the sizes 5, 10, 15, 20 and 30mm. The filler modules are supplied in a joined-together state (filler module blocks) but can be easily separated for individual use.



DIMENSIONS OF THE BASIC MODULES.

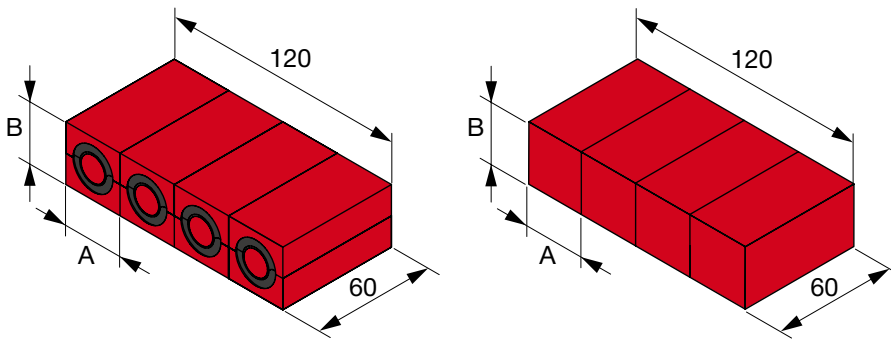

Module	Rohrhersteller		Diameter range	Diameter range per module / adapter
Cable modules				
	Dimension A (in mm)	Dimension B (in mm)		
CFS-T 15/0+3-9	15	15	3 - 9 mm	Black adapter = 3 - 5 mm Grey adapter = 6 - 8 mm Basic module = 9 mm
CFS-T 20/0+5-12	20	20	5 - 12 mm	Black adapter = 5 - 7 mm Grey adapter = 8 - 10 mm Basic module = 11 - 12 mm
CFS-T 20/0+5-16 (with extended diameter range)	20	20	5 - 16 mm	Black adapter = 5 - 8 mm Grey adapter = 9 - 11 mm Red adapter = 12 - 14 mm Basic module = 15 - 16 mm
CFS-T 30/0+13-23	30	30	13 - 23 mm	Black Adapter = 13 - 16 mm Grey Adapter = 17 - 21 mm Basic Module = 22 - 23 mm
CFS-T 40/0+23-33	40	40	23 - 33 mm	Black Adapter = 23 - 26 mm Grey Adapter = 27 - 31 mm Basic Module = 32 - 33 mm
CFS-T 60/0+34-51	60	60	34 - 51 mm	Black Adapter = 34 - 38 mm Grey Adapter = 39 - 43 mm Red insert = 44 - 48 mm Basic Module = 49 - 51 mm
CFS-T 90/0+52-78	90	90	52 - 78 mm	Black Adapter (thick) = 52 - 57 mm Grey Adapter = 58 - 63 mm Red Adapter = 64 - 69 mm Black Adapter (thin) = 70 - 75 mm Basic Module = 76 - 78 mm
CFS-T 120/0+79-99	120	120	79 - 99 mm	Black Adapter = 79 - 84 mm Grey Adapter = 85 - 90 mm Red Adapter = 91 - 96 mm Basic Module = 97 - 99 mm
Filler modules				
CFS-T FB 120x5/0	120	5	0	-
CFS-T FB 120x10/0	120	10	0	-
CFS-T FB 15/0	15	15	0	-
CFS-T FB 20/0	20	20	0	-
CFS-T FB 30/0	30	30	0	-